

SLURRY TANK TRAILER FV2011-19-R295-UK



(De uitvoering op de foto kan afwijken van de standaard)
 (The execution on the picture can deviate from the standard)



Standard Specification

King Pin Weight
 Axle Weight
 Gross trailer weight
 Leeggewicht
 Gross vehicle weight
 Tank diameter
 Fifth wheel height
 Material tank
 3 Axle Valx, drum brakes
 D-TEC Steering system
 Tyre size
 Axle inter distance
 First axle automatic liftaxle
 Hydraulic system
 Pump
 Colour: grey
 Manhole
 Baffle plate
 Control window on top
 Airation- and ventilation
 22 L pressure / 28 L return connection
 2 Support legs, only disconnected if empty
 Hose storage L + R
 Stainless steel stair
 Ventilationbox with ventilation sign, valve and lamp
 Bauer Couplings



Standaard specificatie


Schoteldruk 14.000 kg
 Asstel 27.000 kg
 Totaal toegestane massa 41.000 kg
 Empty weight 6,520 kg (+/- 2%)
 GVW 44.000 kg
 Tankdiameter 1.900 mm
 Schotelhoogte 1.200 mm
 Materiaal tank Stainless steel
 3 assen, Valx trommelrem 9.000 kg
 D-TEC stuursysteem
 Bandenmaat 385/65 R22.5
 Asafstand 1.810/1.810
 1^e as automatische liftas
 Hydraulieksysteem 80-100 l/min.
 Pomp 6 m³/min.
 Kleur: grijs
 Mangat
 Slingerschot
 Kijkglas boven
 Beluchting & ontluuchting
 22 L druk- en 28 L retourleiding
 2 Steunpoten, alleen ontkoppelen bij leeg
 Slangengoot L+ R
 RVS trap
 Ontluuchtingspot met klep, kraan en lampje
 Bauer koppelingen

OPTIONS / OPTIES

04-1-24




04-2-00

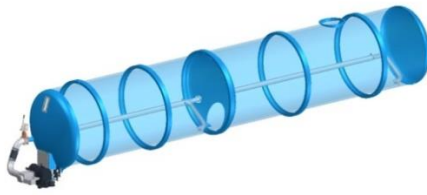

04-2-13




04-2-09



04-12-09 / 10




04-1-42



11-1-4




04-12-11




11-4-20



05-2-04



07-13 / 14




17-L-01 / 02



11-4



11-20




04-4-14




15-4-07




15-3-01



15-3-02



15-5-05



15-4-05




07-39



04-9-02




07-41




04-10-5



04-1-27



11-TT-01




Opties
Tankopties

04-10-05	Kort bordes met leuning
04-12-09	Peilbuis aan de voorzijde handbediend
04-12-10	Peilbuis aan de voorzijde luchbediend
04-12-11	Peilglas achterop rechtsonder
04-1-24	Andock 8" handbediend
04-1-44	Andock 10" luchtbediend
04-2-00	Spoelleiding 4" met 2 uitlopen van 2,5"
04-2-09	Vrije val achterop
04-2-13	Aftapkraan
11-1-4	Niveauaanwijzer met automatische pompafslag
04-9-02	lange goot links
05-2-04	100L RVS watertank met GK aansluiting rechts achter en bovenop
07-13	RVS gereedschapskist 1m
07-14	2x RVS gereedschapskist 1m
07-39	bord geen gevaarlijke stoffen (3x)
07-41	Stiekn over de goot
17-L-01/02	Centrale smering Lincoln 2-vet

Laden/lossen

04-4-07	Vogelsang pomp, 6.000L/min, zonder slijtschalen
04-4-14	Pompbediening vooraan
04-1-27	Hydrauliekleidingen verlengd tot stekkerplaat

Asstellen

11-4-20	Assen 9 ton Valx schijfrem as
11-TT-01	knop voor aslift
11-20	Drukmeter
11-4	Knoppen luchtvering

Verlichting

15-3-01	1 werklamp en 1 zwaailamp
15-3-02	2x werklamp en 2x zwaailamp
15-4-05	Werklampen zijkant (2x)
15-4-07	Werklampen achter (2x)
15-5-05	2 x 3-kamerlamp bij kijkglas

Coating

09-5-04	Tankvat gespoten in 1 kleur
---------	-----------------------------


Options
Tank options

Short catwalk to ventilation with rail	_____
Sight glass at the front, at the conrer with manual valve	_____
Sight glass at the front, at the corner with pneumatic valve.	_____
Control window at the rear, bottom side right	_____
Andock funnel 8" top, manual valve	_____
Andock funnel 10" top, pneumatic valve	_____
Scavanging conduit 4" with 2 outlets of 2,5". One on front side and one half-way the tank	_____
6" free flow connection rear	_____
Drain tap	_____
Level indicator with automatic pump stop	_____
Hose storage, length: 5 m right and 8 m left side of trailer. On the front side right, hose storage has a double width.	_____
100L watertank + tap on top and rear	_____
Stainless steel toolbox 1m	_____
2x stainless steel toolbox 1m	_____
3x sign low hazardous product	_____
Shock cord over the gutters.	_____
Lincoln automatic greasing	_____

Loading/unloading

Vogelsang pomp, 6.000L/min.	_____
Manual pump-stop at the front of the trailer	_____
Hydraulic pipes extended to connection plate	_____

Axles

9 tons Valx axles, equipped with disc brakes	_____
Lift axel controle with button	_____
Air suspension with pressure gauge.	_____
Air suspension with raise / lower valve	_____

Lighting

1x Working light + 1x rotating beacon	_____
2x Working light + 2x rotating beacon	_____
2 work lights on the side	_____
2x led working lights on the rear	_____
2x round lights at the rear on top of the upper control window	_____

Coating

Painting of the trailer in 1 colour, no metallic	_____
--	-------

